


RACCORDI DI TRANSIZIONE PE-ACCIAIO PE-STEEL FITTINGS

DESCRIZIONE - DESCRIPTION

- RACCORDO GAS CON BOCCOLA A COMPRESIONE IN ACCIAIO INOX
- TUBO IN ACCIAIO RIVESTITO IN POLIETILENE
- PRESSIONE MASSIMA D'ESERCIZIO 4 BAR GAS

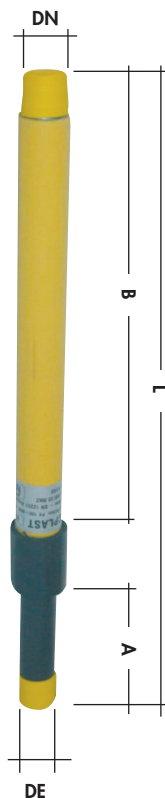

Cod.	A	B	L	DE	DN
DIRITTO CON TERMINALE FILETTATO					
RCFD25	100	310	460	25	20 - 3/4"
RCFD32	100	310	460	32	25- 1"
RCFD40	105	310	460	40	32- 1" 1/4
RCFD50	115	310	460	50	40 - 1" 1/2
RCFD63	120	310	460	63	50 - 2"
RCFD75	130	310	510	75	65 - 2" 1/2
RCFD90	150	310	520	90	80 - 3"
RCFD110	160	310	520	110	100 - 4"
RCFD125	160	310	520	125	100 - 4"

DIRITTO CON TERMINALE LISCIO A SALDARE


RCSD25	100	310	460	25	20 - 3/4"
RCSD32	100	310	460	32	25- 1"
RCSD40	105	310	460	40	32- 1" 1/4
RCSD50	115	310	460	50	40 - 1" 1/2
RCSD63	120	310	460	63	50 - 2"
RCSD75	130	310	510	75	65 - 2" 1/2
RCSD90	150	310	520	90	80 - 3"
RCSD110	160	310	520	110	100 - 4"
RCSD125	160	310	520	125	100 - 4"

Misure maggiori a richiesta

DIRITTO CON TERMINALE FILETTATO - CON MISURA "B" LUNGA 1 METRO

RLFD25	100	1000	1150	25	20 - 3/4"
RLFD32	100	1000	1150	32	25- 1"
RLFD40	105	1000	1150	40	32- 1" 1/4
RLFD50	115	1000	1150	50	40 - 1" 1/2
RLFD63	120	1000	1150	63	50 - 2"
RLFD75	130	1000	1250	75	65 - 2" 1/2
RLFD90	150	1000	1280	90	80 - 3"
RLFD110	160	1000	1280	110	100 - 4"
RLFD125	160	1000	1280	125	100 - 4"

Misure maggiori a richiesta

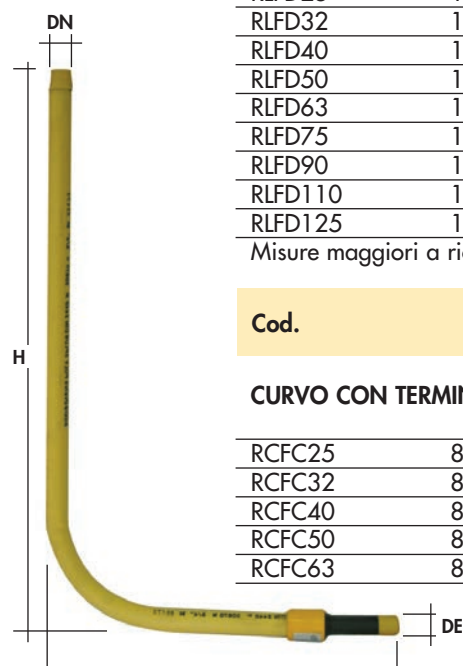

Cod.	H	A	L	DE	DN
CURVO CON TERMINALE FILETTATO					
RCFC25	800	100	460	25	20 - 3/4"
RCFC32	800	100	470	32	25- 1"
RCFC40	800	105	540	40	32- 1" 1/4
RCFC50	800	115	600	50	40 - 1" 1/2
RCFC63	800	120	620	63	50 - 2"